

## DFW-IECEX3GD

"DFW-IECEX3GD": IECEX WEIGHT INDICATOR FOR Ex 2 & 22 ZONES



Weight indicator for Ex areas classified as hazardous. ATEX/IECEX marking:  
II 3G Ex nR IIC T6 Gc X (0°C ≤ Ta ≤ 50°C) for gas  
II 3D Ex tc IIIC T85°C Dc IP65 X (0°C ≤ Ta ≤ 50°C) for dust.  
ATEX/IECEX marking with intrinsically safe connection for load cells:  
II 3G Ex nR [ia] IIC T6 Gc X (0°C ≤ Ta ≤ 50°C) for gas  
II 3D Ex tc [ia] IIIC T85°C Dc IP65 X (0°C ≤ Ta ≤ 50°C) for dust.  
Suitable to realize weighing, dosing and automation systems. CE-M approvable (OIML R-76 / EN 45501).

The best solution  
for advanced industrial  
applications

## NEWS

- IECEx certification.
- New enclosure with screwless front closure for easy cleaning of the indicator.
- PG7 and PG9 cable glands with adapters for 4 to 7 mm and 7 to 10 mm cable routing. Equipped with anti-friction system that does not require additional external cable fixing, as required by the IECEx scheme and ATEX directives.
- Available in specific version for direct connection to load cells installed in zone 1/21 and 0/20.

## TECHNICAL FEATURES

- 17-key high thickness waterproof keyboard.
- LCD display with backlight as standard with 6 25 mm digits.
- Satin IP68 stainless steel enclosure.
- Suitable for use on the table.
- Dimensions: 280x143x185mm.
- Up to 10.000e or 3 x 3000e @ 0,3  $\mu\text{V/d}$  OIML approved version and CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use.
- Up to 8 signal linearisation points with DINITOOLS (3 from the keyboard).
- Internal resolution up to 3.000.000 points.
- 24-bit sigma-delta A/D converter, up to 200 conv./sec. with automatic frequency selection.
- Board protection case inside the box.
- Calibration and digital Set-Up from the keyboard.
- Instrument management and configuration from PC with DINITOOLS.
- 4 channels (for single weighing system).
- Power supply from 110-240Vac line or 12-24 Vdc Max. 25.2W (optional power cable).
- Connection with up to 8 load cells of 350 Ohm.

## I/O SECTION

- RS232/C bi-directional port configurable for connection to printer/labeller in safe zone.
- RS232/C bi-directional port configurable for PC, PLC, additional remote display, in safe zone.

## FUNCTIONS:

- **KEYBOARD:**

Zeroing, Automatic tare, Presetable tare, printing and/or data transmission, selectable function command, on/off switching, database of 20 tares, 2 Numeric IDs, keyboard lock, repetition of last printout made.

- **SELECTABLE FUNCTIONS:**

- High Resolution Weighing x 10.
- Net/Gross or lb/kg conversion.
- Accumulation.
- Formula weighing.
- +/- Checkweighing.
- Percentage weighing.
- Approved transmission of the weight to PC/PLC (with ALMEM Alibi memory option).
- Counting.
- In/Out Truck weighing.
- Hold.
- Set Point Control (with DFIO option).

## AVAILABLE LANGUAGES FOR PRINTING

- IT, EN, FR, DE, ES, PT, CN\*, EL\*

\* For Chinese and Greek a programming of the printer/labeler is required (S1, only at the time of order)

## MASTER/REPEATER OPTION


- Specific programme (MSTSLV code) to use the indicator as a universal weight repeater or as a multi-scale repeater (MASTER) in combination with DFW/DGT/MCW.  
FUNCTIONING MODES:
- Multi-scale repeater (MASTER):  
function which allows the user to repeat up to 32 independent scales, with the possibility of managing their functions, or displaying and printing the sum of the weights of all the scales.
- UNIVERSAL weight repeater:  
function which allows the user to repeat the weight of any scales, through the configuration of the input string.

For additional information, [Click here](#).


DETAIL 1



DETAIL 2

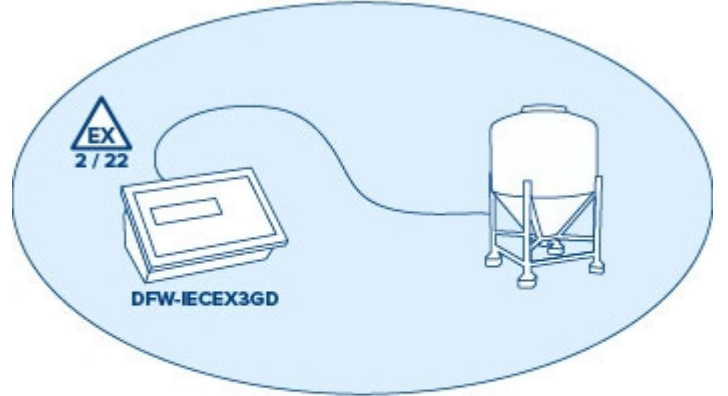

DETAIL 3

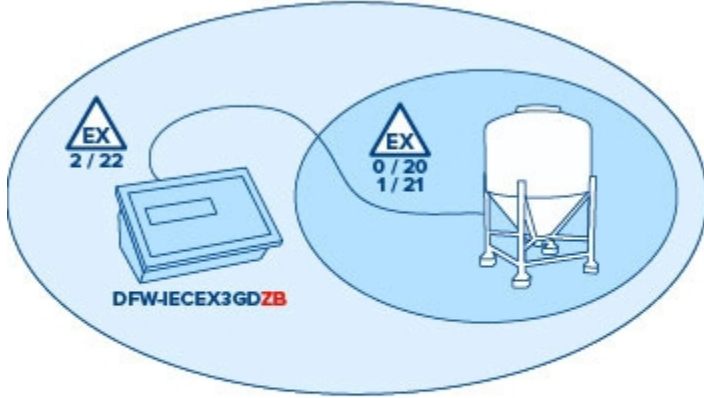

DETAIL 4





“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO  
FRANCE sarl  
France

DINI ARGEO  
GMBH  
Germany

DINI ARGEO  
UK Ltd  
United Kingdom

DINI ARGEO WEIGHING  
INSTRUMENTS Ltd  
China

DINI ARGEO  
OCEANIA  
Australia



**COMPANY HEADQUARTERS**

Via Della Fisica, 20  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 843418

**SERVICE ASSISTANCE**

Via Dell'Elettronica, 15  
41042 Spezzano di Fiorano Modena • Italy  
Tel. +39.0536 921784



SALES AND TECHNICAL ASSISTANCE SERVICE